
# LIGHTCRAFT 0 U T D O O R

LANDSCAPE LIGHTING MANUFACTURER



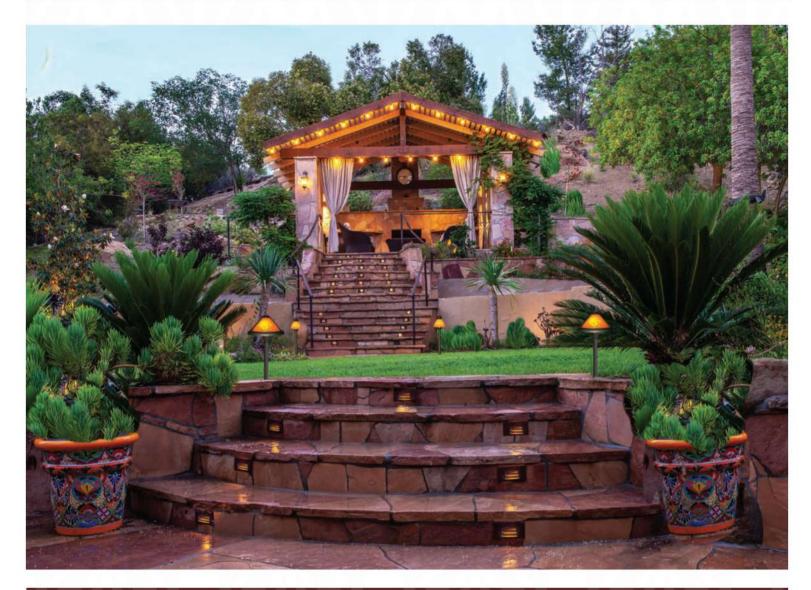

# TABLE OF CONTENTS

, I
<b>A</b>
0
$\bigcirc$
$\gamma$
R

ACCENT LIGHTING	8-14
INTEGRATED POWER FLOOD LIGHTING	15
PATH/AREA LIGHTING	16-29
IN-GROUND LIGHTING	30-33
STEP/DECK LIGHTING	34-38
HANGING PENDANT LIGHTING	39
GLOBE COLLECTION	40-43
BISTRO COLLECTION	44-46
LED FLEX & TAPE	47-49
MINI STRING LIGHTS	50
UNDERWATER LIGHTING	51
LAMPS	52-53
ACCESSORIES	54
TRANSFORMERS	55







OUR PRESIDENT, BRUCE DENNIS WAS ONE OF THE FIRST TO INTRODUCE LED LIGHTING ALMOST 20 YEARS AGO. BRUCE IS RECOGNIZED FOR PIONEERING MUCH OF THE LANDSCAPE LIGHTING DESIGNS THAT ARE STILL BEING USED BY OUR INDUSTRY TODAY. LIGHTCRAFT CONTINUES THAT TRADITION OF INNOVATION AND DESIGN.



**BIG SMOKY NBZ** FL 105B PAGE 9



**BIG SMOKY BK** FL 105B PAGE 9



LITTLE SMOKY FL 104B PAGE 9



TIPARILLO FL 103B PAGE 9



CONVEX 16 FL 500B PAGE 10



HIGHLITER FL 289B PAGE 10



FL 286B

PAGE 10



SPECIFIER BRASS NBZ FL 501B PAGE 11



SPECIFIER ALUMINUM BK SPECIFIER ALUMINUM BZ FL 501A FL 501A PAGE 11 PAGE 11





E.T. WALL WASHER NBZ

FL 113B

PAGE 12



E.T. WALL WASHER BK FL 113B PAGE 12



MATADOR FL 114B PAGE 12

CLASSICO

AP 00 01B

PAGE 18



COHIBA FL 115B PAGE 13





OAK LITER FL 117B PAGE 13



WALL LITER FL 116B PAGE 14



PALM LITER FL 121A BLACK OR BRONZE PAGE 14



20W COHIBA POWER FLOOD LED FL 115B 20W PAGE 15



6W ET POWER FLOOD LED FL 113B 6W PAGE 15

PERFECTO JARDIN PETITE FLORES FLORES MICA OPAL MICA AMBER AP 00 03B AP 00 08B AP 00 11B AP 00 12B AP 00 21B AP 00 22B PAGE 18 PAGE 19 PAGE 19 PAGE 19 PAGE 20 PAGE 20







FLAT TOP IG 63 00B PAGE 31



**GRILL TOP** IG 63 01B PAGE 32



SCOOP TOP IG 63 02B PAGE 32



VERTICAL TOP IG 63 06B PAGE 32







CORE FLAT TOP NATURAL BRONZE SD 610B PAGE 33

CORE FLAT TOP SD 610B PAGE 33

CORE SCOOP TOP STAINLESS STEEL NATURAL BRONZE SD 612B PAGE 33

818.349.2663 VISUAL INDEX 5



PAR 36 WELL IG 300P PAGE 33



BRASS DEBRIS GUARD IG 304B PAGE 33



**STEP LIGHT 4** LED SD V 4 NBZ PAGE 35



**STEP LIGHT 4** LED SD V 4 BK PAGE 35



STEP LIGHT 7 LED SD V 7 NBZ PAGE 35




**STEP LIGHT 7** LED SD V 7 BK PAGE 35



CORE SCOOP TOP SD 612B



SINGLE RECESSED SD 400B PAGE 37











MASONRY LIGHT 7

LED ML 7

PAGE 36

DOUBLE RECESSED SD 403B PAGE 37



SD 404B

PAGE 37

DOUBLE WINDOW SD 405B PAGE 37

CORE FLAT TOP SD 610B PAGE 38

CORE FLAT TOP STAINLESS STEEL SD 610B PAGE 38





**UP/DOWN** 

W 701B

PAGE 38



LUNA PENDANT MINI STARLIGHTER H16B PAGE 39

PENDANT H107B

PAGE 39



PENDANT

H108B

PAGE 39

STARLIGHTER HANGING PERFECTO H 03B PAGE 39

HANGING MICA AMBER

H 21B AMBER

PAGE 39



HANGING MICA OPAL H 22B OPAL PAGE 39



BK E26 PAGE 45

**E26 SUSPENDED** 

**BISTRO STRING** 

**BK E26 S** 

PAGE 45

S14 LAMPS PAGE 45




PETAL BISTRO SHADE **BK 111 BZ** PAGE 45



HAMMER BISTRO SHADE **BK 411 BZ** PAGE 45



PYRAMID BISTRO SHADE BK 511 BZ PAGE 45

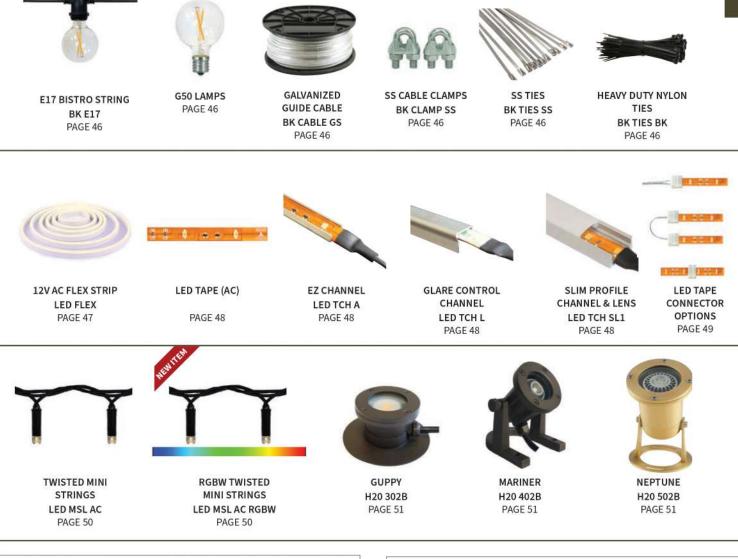





#### TRANSFORMERS & POWER SUPPLIES PAGE 55




# ACCENT LIGHTING

ACCENT LIGHTING ADDS VISUAL DRAMA AND EXCITEMENT TO ANY ENVIRONMENT, HIGHLIGHTING VERTICAL ELEMENTS SUCH AS TREES, COLUMNS AND WALLS.


## ACCENT LIGHTING WITH GLARE CONTROL

Adjustable shroud allows light control from narrow to wide flood. Minimizes hot spots and maximizes light control. Mounting options - see page 54 (Lamps Sold Separately)

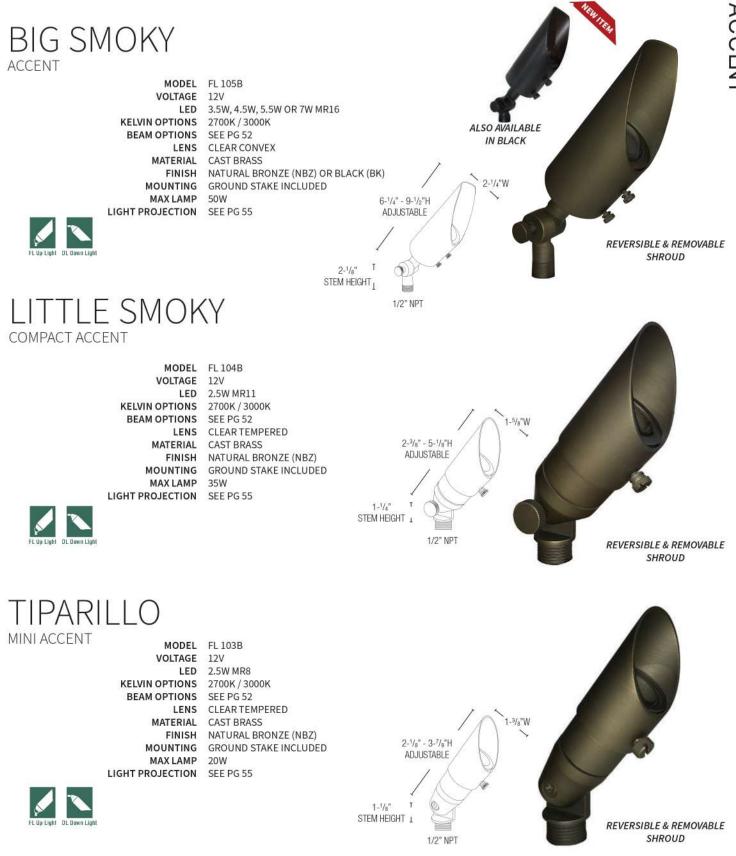

#### TRADITIONAL CAST BRASS ACCENT LIGHTS

Heavy cast products with tempered lens, silicone sealed compartment and heavy adjustable knuckle. Can be used as an up or down light. Mounting options - see page 54 (Lamps Sold Separately)

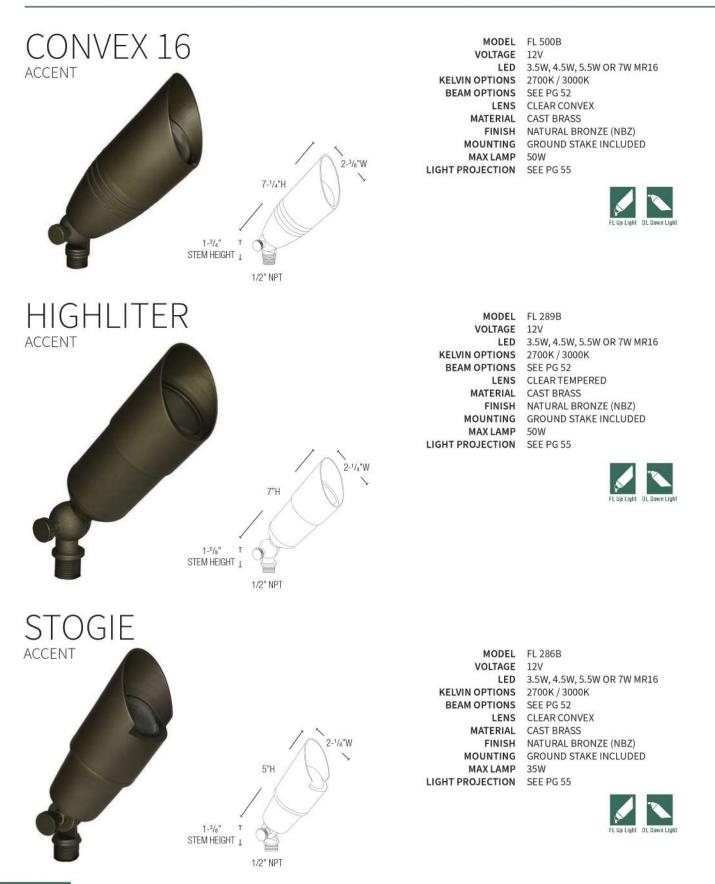

# LIGHTING ACCENT

#### ARCHITECT SPECIFIER ACCENT LIGHTS

Specify Brass or Aluminum Material and Finish Option - **Comes with both Flat and Angled Shrouds** - Coordinating Path Light Series (PS) - see page 26.

ALUMINUM

Black (BK) Finishes

Aluminum available in Bronze (BZ) and

Mounting Options - see page 54 (Lamps Sold Separately)

#### BRASS

Brass available in Natural Bronze (NBZ) Includes both Flat and Angled Shrouds



## TRADITIONAL CAST BRASS ACCENT LIGHTS


Heavy cast brass products with tempered lens, silicone sealed compartment and heavy adjustable knuckle. Can be used as an Up or Down light. (Lamps Sold Separately)

E.T. WALL WASHER COMPACT ACCENT

> ALSO AVAILABLE IN BLACK

INTEGRATED OPTION - SEE PAGE 15

MODEL FL 113B VOLTAGE 12V LED 1.5W, 2.5W, 3.5W, 5W OR 6W T3 KELVIN OPTION 2700K / 3000K LENS CLEAR AND FROST INCLUDED MATERIAL CAST BRASS FINISH NATURAL BRONZE (NBZ) OR BLACK (BK) MOUNTING GROUND STAKE INCLUDED MAX LAMP 35W LIGHT PROJECTION SEE PG 55






# MATADOR WALL WASHER



MODEL FL 114B VOLTAGE 12V LED 1.5W, 2.5W, 3.5W, 5W OR 6W T3 KELVIN OPTION 2700K / 3000K LENS CLEAR AND FROST INCLUDED MATERIAL CAST BRASS FINISH NATURAL BRONZE (NBZ) MOUNTING GROUND STAKE INCLUDED MAX LAMP 35W LIGHT PROJECTION SEE PG 55






## LARGE BRASS ACCENT FLOOD LIGHTING

Solid brass wash lights are ideal for large trees, walls and foliage. Optional Mountings: See pg 54 (Lamps Sold Separately) COHIBA LARGE ACCENT

MODEL FL 115B VOLTAGE 12V LED 3.5W, 4.5W, 5.5W OR 7W MR16 KELVIN OPTION 2700K / 3000K BEAM OPTION SEE PG 52 LENS CLEAR AND FROST INCLUDED MATERIAL CAST BRASS FINISH NATURAL BRONZE (NBZ) MOUNTING GROUND STAKE INCLUDED MAX LAMP 75W LIGHT PROJECTION SEE PG 55





**INTEGRATED OPTION - SEE PAGE 15** 







 MODEL
 FL 117B

 VOLTAGE
 12V

 LED
 6W OR 10W PAR36

 KELVIN OPTIONS
 2700K / 3000K

 BEAM SPREAD
 60°

 MATERIAL
 SOLID BRASS


 FINISH
 NATURAL BRONZE (NBZ)

 MOUNTING
 GROUND STAKE INCLUDED

 MAX LAMP
 50W

 LIGHT PROJECTION
 SEE PG 55





## **BRASS HEDGE / WALL LIGHTER**

Heavy brass fixture with tempered lens, silicone sealed compartment and heavy adjustable knuckle. Allows for wide distribution of light. (Lamps Sold Separately)



## CAST ALUMINUM ACCENT

Value oriented design for up and down accent lighting. (Lamps Sold Separately)



## INTEGRATED CAST BRASS POWER FLOOD COLLECTION

Field replaceable LED board with "**Quick Change Technology**" by Lightcraft Outdoor. Cast Brass and dimmable, high lumen flood and accent lighting. Optional Mountings: See pg 54








MODEL	LED FL 113B 6W
VOLTAGE	12V
LED	6W
KELVIN	2700K / 3000K
BEAM	60 DEGREE
LENS	TEMPERED OPTIC LENS
MATERIAL	CAST BRASS
FINISH	NATURAL BRONZE (NBZ)
MOUNTING	GROUND STAKE INCLUDED
LUMENS	350
PROJECTION	SEE PG 55

LIGHT

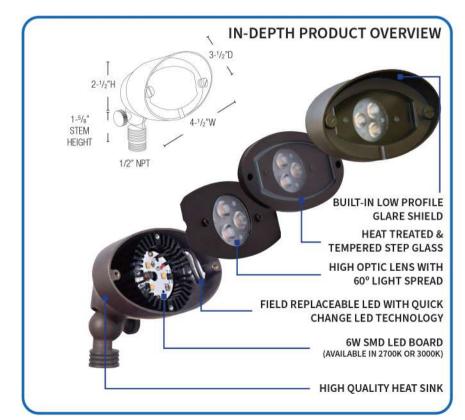


# PATH / AREA LIGHTING

FRAME YOUR PROPERTY WITH PATHWAY/AREA LIGHTING ADDING CHARM, WARMTH AND BEAUTY TO YOUR OUTDOOR DESIGNS. CHOOSE FROM DECORATIVE "GARDEN ART" FIXTURES TO ILLUMINATE YOUR WALKWAYS.


## UNIVERSAL PATH SYSTEM (AP)

Our **12V** cast brass universal path system is one of the most user friendly products available in the landscape lighting industry. This system is designed for flexibility; simply choose your stem and shade options. (Lamps Sold Separately)

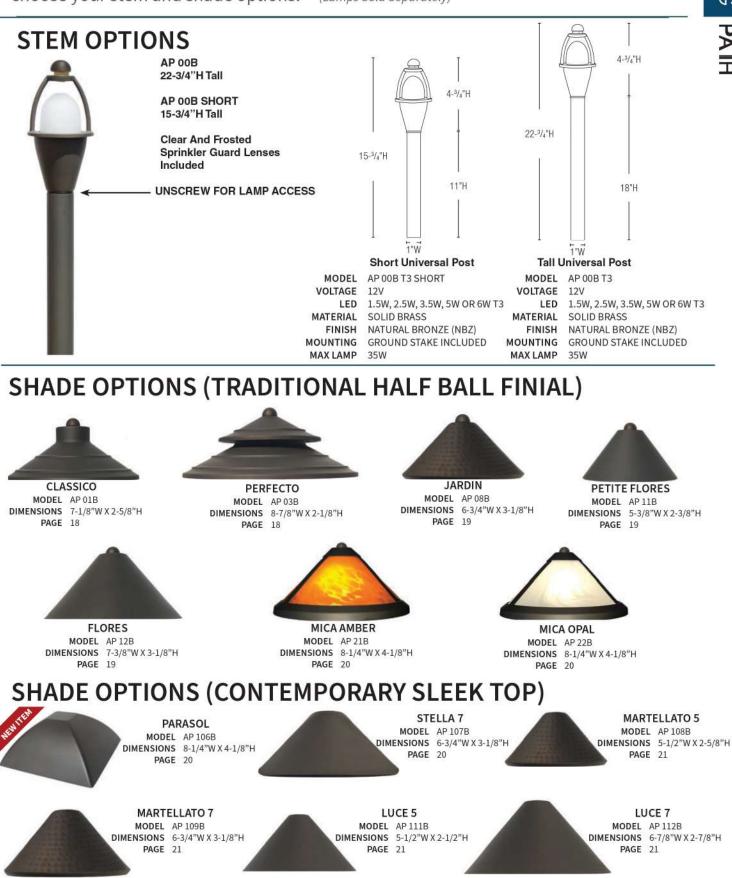

#### **UNIVERSAL CLASSICO** AREA LIGHT

MODEL MODEL VOLTAGE LED KELVIN OPTIONS LENS MATERIAL FINISH MOUNTING MAX LAMP LIGHT PROJECTION	AP 00B 01B AP 00 SHORT 01B 12V 1.5W, 2.5W, 3.5W, 5W OR 6W T3 2700K / 3000K CLEAR AND FROST INCLUDED SOLID BRASS NATURAL BRONZE (NBZ) GROUND STAKE INCLUDED 35W SEE PG 55
I 2-5/8"H I 15-3/4"	H



#### **UNIVERSAL PERFECTO AREA LIGHT**


MODEL AP 00B 03B MODEL AP 00 SHORT 03B VOLTAGE 12V LED 1.5W, 2.5W, 3.5W, 5W OR 6W T3 **KELVIN OPTIONS** 2700K / 3000K LENS CLEAR AND FROST INCLUDED MATERIAL SOLID BRASS FINISH NATURAL BRONZE (NBZ) MOUNTING GROUND STAKE INCLUDED MAX LAMP 35W LIGHT PROJECTION SEE PG 55 ⊷ 8-<sup>7</sup>/8"W → — 8-<sup>7</sup>/8"W — 2-7/8"H 2-7/8"H 22-3/4"H 15-3/4"H SHORT TALL

SHORT

#### **UNIVERSAL JARDIN** AREA LIGHT

VOLTAGE 12V KELVIN OPTIONS 2700K / 3000K FINISH MOUNTING MAX LAMP 35W LIGHT PROJECTION SEE PG 55









#### UNIVERSAL PETITE FLORES COMPACT AREA LIGHT


MODEL AP 00B 11B VOLTAGE 12V KELVIN OPTIONS 2700K / 3000K LIGHT PROJECTION SEE PG 55

MODEL AP 00B SHORT 11B LED 1.5W, 2.5W, 3.5W, 5W OR 6W T3 LENS CLEAR AND FROST INCLUDED MATERIAL SOLID BRASS NATURAL BRONZE (NBZ) GROUND STAKE INCLUDED 35W

-5-3/a"₩---+

2-3/8"H

FINISH MOUNTING MAX LAMP




SHORT




VOLTAGE 12V LED **KELVIN OPTIONS** 

TALL MODEL AP 00B 12B MODEL AP 00B SHORT 12B 1.5W, 2.5W, 3.5W, 5W OR 6W T3 2700K / 3000K LENS CLEAR AND FROST INCLUDED MATERIAL SOLID BRASS FINISH NATURAL BRONZE (NBZ) MOUNTING GROUND STAKE INCLUDED 35W

MAX LAMP LIGHT PROJECTION SEE PG 55



**UNIVERSAL FLORES AREA LIGHT** 

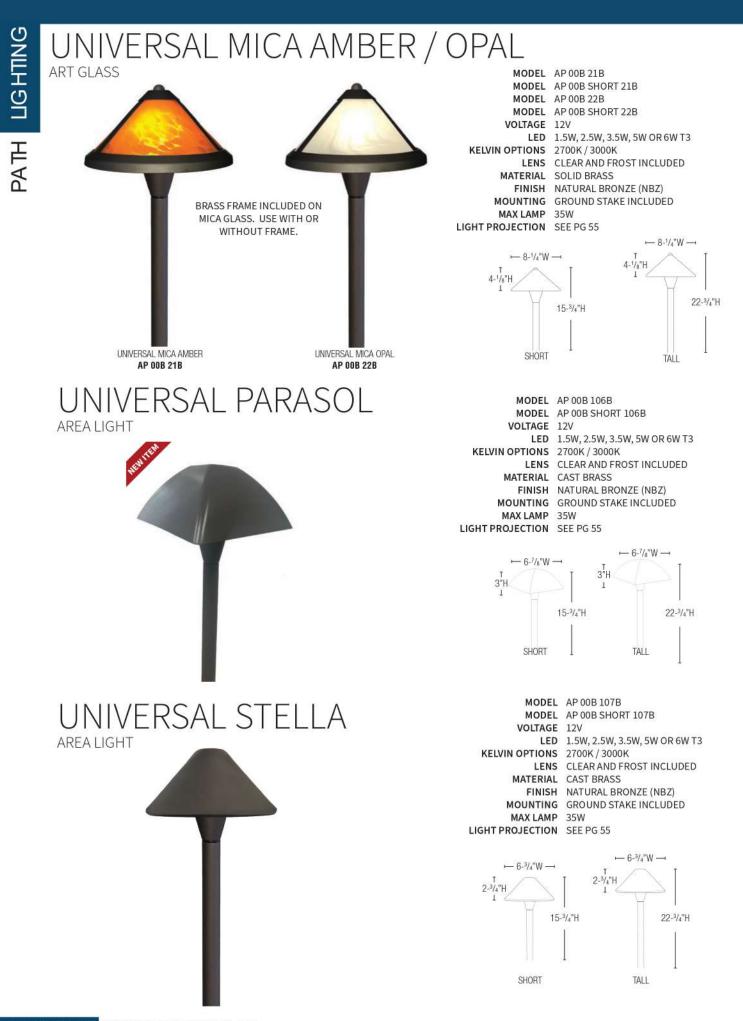


20 PATH LIGHTING WWW.LIGHTCRAFTOUTDOOR.COM



#### UNIVERSAL MARTELLA AREA LIGHT

LIGHTING PATH

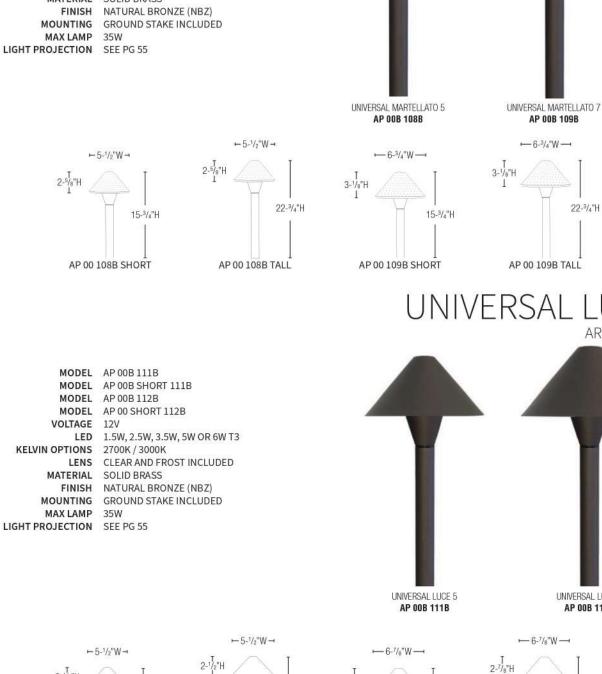

MODEL	AP 00B 108B
MODEL	AP 00B SHORT 108B
MODEL	AP 00B 109B
MODEL	AP 00B SHORT 109B
VOLTAGE	12V
LED	1.5W, 2.5W, 3.5W, 5W OR 6W T3
<b>KELVIN OPTIONS</b>	2700K / 3000K
LENS	CLEAR AND FROST INCLUDED
MATERIAL	SOLID BRASS
FINISH	NATURAL BRONZE (NBZ)
MOUNTING	GROUND STAKE INCLUDED
MAX LAMP	35W
LIGHT PROJECTION	SEE PG 55







**UNIVERSAL LUCE** AREA LIGHT





AP 00B 112B


22-3/4"H











AP 00 111B SHORT

AP 00 111B TALL



BY LIGHTCRAFT OUTDOOR


#### • STYLISH CONTEMPORARY DESIGNS FOR ARCHITECTURAL PROPERTIES

(Lamps Sold Separately)

# FLAT SIDE PATH



ALSO AVAILABLE IN BLACK MODELAP 390BVOLTAGE12VLED1.5W, 2.5W, 3.5W, 5W OR 6W T3KELVIN OPTIONS2700K / 3000KLENSFROST ACRYLICMATERIALSOLID BRASSFINISHNATURAL BRONZE (NBZ) OR BLACK (BK)MOUNTINGGROUND STAKE INCLUDEDLIGHT PROJECTIONSEE PG 55






#### THE MODERNO COLLECTION

Contemporary Designs For Architectural Properties



ALSO AVAILABLE IN BLACK


MODELAP 300BVOLTAGE12VLED1.5W, 2.5W, OR 3.5W T3KELVIN OPTIONS2700K / 3000KLENSFROST ACRYLICMATERIALSOLID BRASSFINISHNATURAL BRONZE (NBZ) OR BLACK (BK)MOUNTINGGROUND STAKE INCLUDEDLIGHT PROJECTIONSEE PG 55







AP 310B
12V
1.5W, 2.5W OR 3.5W T3
2700K / 3000K
FROST ACRYLIC
SOLID BRASS
NATURAL BRONZE (NBZ)
GROUND STAKE INCLUDED
SEE PG 55





PITCHED PATH

#### THE MODERNO COLLECTION

Contemporary Designs For Architectural Properties (Lamps Sold Separately)

BELLA 3 MINI COMPACT AREA LIGHT



MODEL	AP 197B
VOLTAGE	12V
LED	1.5W, 2.5W OR 3.5W T3
<b>KELVIN OPTIONS</b>	2700K / 3000K
LENS	FROST
MATERIAL	CAST BRASS
FINISH	NATURAL BRONZE (NBZ)
MOUNTING	GROUND STAKE INCLUDED
MAX LAMP	35W
LIGHT PROJECTION	SEE PG 55

AP 197B






MODEL	AP 198B
VOLTAGE	12V
LED	1.5W, 2.5W OR 3.5W T3
<b>KELVIN OPTIONS</b>	2700K / 3000K
LENS	FROST
MATERIAL	CAST BRASS
FINISH	NATURAL BRONZE (NBZ)
MOUNTING	GROUND STAKE INCLUDED
MAX LAMP	35W
LIGHT PROJECTION	SEE PG 55

#### THE ILLUMA IS A TRANSITIONAL PATHWAY FIXTURE

Great for lighting steps and/or illuminating foliage. Use for both direct and indirect lighting applications. Available in window or louver options. (Lamps Sold Separately)



WINDOW MODEL




•COMPACT CONTEMPORARY DESIGN •SOLID BRASS •UV PROTECTED FROSTED ACRYLIC LENS •FIELD REPLACEABLE LED •MULTIPLE HEIGHT OPTIONS



MODEL AP-341B LOUVER MODEL





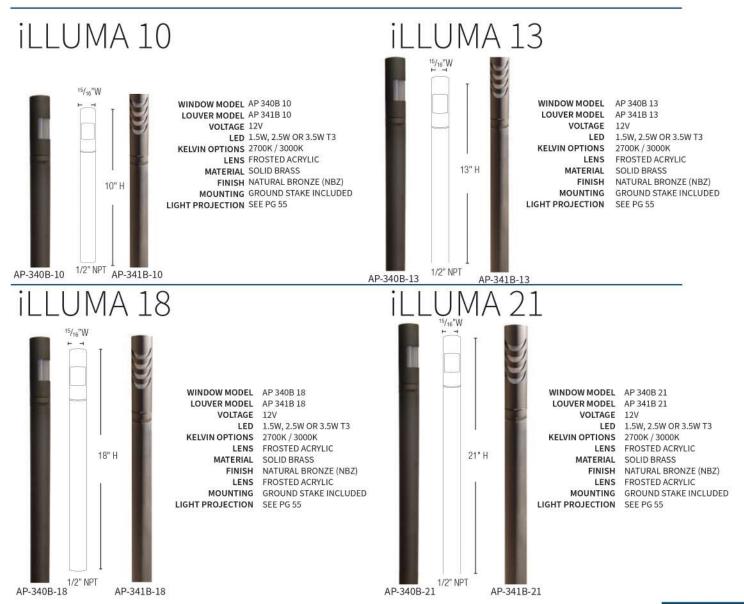

## ARCHITECT PATH AND DRIVEWAY LIGHTING


Specify Brass or Aluminum Material and Finish Option - **Comes with both Flat and Angled Shrouds** - Coordinating Flood Accent Light Series (FL)- see page 11. (Lamps Sold Separately)



Brass available in Natural Bronze (NBZ) Includes both Flat and Angled Shrouds

#### ALUMINUM

Aluminum available in Bronze (BZ) and Black (BK) Finishes *Includes both Flat and Angled Shrouds* 

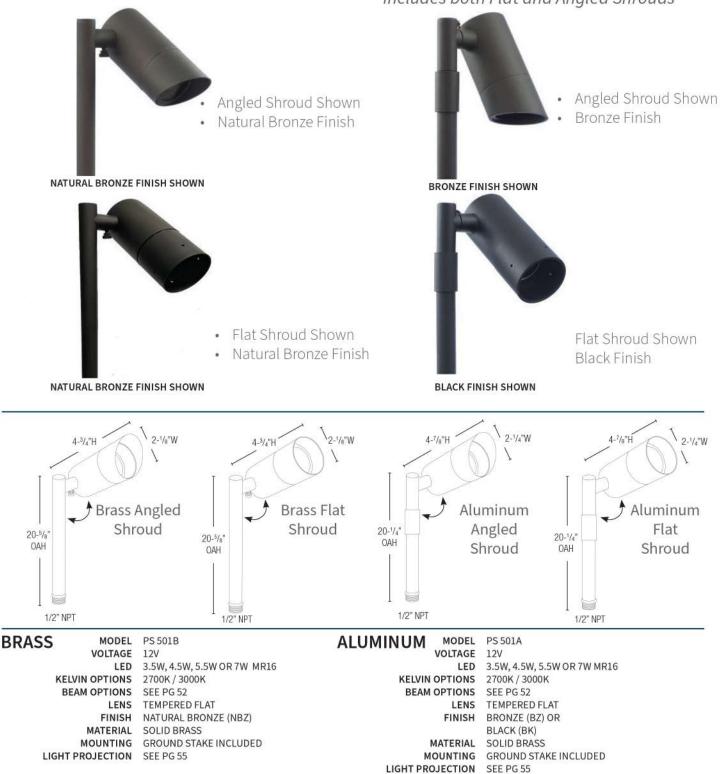


# DIRECTIONAL PATH SERIES

DIRECTIONAL/DRIVEWAY

(Lamps Sold Separately)

#### BIG SMOKY PATH DRAMATIC ACCENT/PATH LIGHTING


MODELPS 105BVOLTAGE12VLED3.5W, 4.5W, 5.5W OR 7W MR16KELVIN OPTIONS2700K / 3000KBEAM OPTIONSSEE PG 52LENSCLEAR CONVEXMATERIALSOLID BRASSFINISHNATURAL BRONZE (NBZ)MOUNTINGGROUND STAKE INCLUDEDLIGHT PROJECTIONSEE PG 55





#### LITTLE SMOKY PATH SMALLER SCALE ACCENT/PATH LIGHTING


MODEL PS 104B VOLTAGE 12V LED 2.5W MR11 KELVIN OPTIONS 2700K / 3000K BEAM OPTIONS SEE PG 52 LENS CLEAR FLAT MATERIAL SOLID BRASS FINISH NATURAL BRONZE (NBZ) MOUNTING GROUND STAKE INCLUDED LIGHT PROJECTION SEE PG 55





#### E.T. PATH WIDE LIGHT DISTRIBUTION

MODEL	PS 113B
VOLTAGE	12V
LED	1.5W, 2.5W, 3.5W, 5W OR 6W
<b>KELVIN OPTIONS</b>	2700K / 3000K
LENS	CLEAR AND FROST INCLUDED
MATERIAL	SOLID BRASS
FINISH	NATURAL BRONZE (NBZ)
MOUNTING	GROUND STAKE INCLUDED
LIGHT PROJECTION	SEE PG 55
OPTION	6W INTEGRATED E.T. PATH - ASK FACTORY





# DIRECTIONAL PATH SERIES

(Lamps Sold Separately)

# LUNA MARTELLATO



MODEL	AP 128B 5
MODEL	AP 128B 7
VOLTAGE	12V
LED	2.5W OR 3.5W SC
<b>KELVIN OPTIONS</b>	2700K / 3000K
MATERIAL	SOLID BRASS
FINISH	NATURAL BRONZE (NBZ)
MOUNTING	GROUND STAKE INCLUDED
LIGHT PROJECTION	6-8 FT AVG

LUNA FLORES



MODEL	AP 211B
VOLTAGE	12V
LED	2.5W OR 3.5W SC
<b>KELVIN OPTIONS</b>	2700K / 3000K
MATERIAL	SOLID BRASS
FINISH	NATURAL BRONZE (NBZ)
MOUNTING	GROUND STAKE INCLUDED
LIGHT PROJECTION	6-8 FT AVG

LUNA ESCORT




MODEL	AP 214B
VOLTAGE	12V
LED	1.5W, 2.5, 3.5W, 5W OR 6W T3
<b>KELVIN OPTIONS</b>	2700K / 3000K
LENS	FROST DOME
MATERIAL	SOLID BRASS
FINISH	NATURAL BRONZE (NBZ)
MOUNTING	GROUND STAKE INCLUDED
LIGHT PROJECTION	6-8 FT AVG

LUNA VIDRIO




MODEL	AP 210B AMBER
MODEL	AP 210B OPAL
VOLTAGE	12V
LED	2.5W OR 3.5W SC
<b>KELVIN OPTIONS</b>	2700K / 3000K
MATERIAL	SOLID BRASS
FINISH	NATURAL BRONZE (NBZ)
MOUNTING	GROUND STAKE INCLUDED
LIGHT PROJECTION	3-5 FT AVG
	⊷ 6"W







MODELAP C 210B AMBERMODELAP C 210B OPALVOLTAGE12VLED1.5W, 2.5W OR 3.5W T3KELVIN OPTIONS2700K / 3000KMATERIALSOLID BRASSFINISHNATURAL BRONZE (NBZ)MOUNTINGGROUND STAKE INCLUDEDLIGHT PROJECTIONSEE PG 55



UNIVERSAL POST AMBER AND OPAL OPTIONS - SEE PG. 20

# IN GROUND LIGHTING

IN GROUND LIGHTING IS THE PERFECT CHOICE FOR DISCREET UPLIGHTING. APPLICATIONS INCLUDE TREES, COLUMNS AND ARCHITECTURAL FEATURES. SEE THE EFFECT, NOT THE SOURCE.

## **CAST BRASS IN GROUND LIGHTING 12V**

Compact Composite Housing With 4 Heavy Cast Brass Trim Cover Options. Ideal For Bright And Concealed Lighting Effects (Lamps Sold Separately)



l

**Complete Fixture** 

Dimensions

**Top Dimensions** 

CAN ALSO BE USED WITH LED T3, MR8 OR MR11 FOR SOFT ILLUMINATION



Dimensions

USE LED T3, MR8 OR MR11 FOR SOFTER ILLUMINATION

#### CORE FLAT TOP DECK / WALL / IN GROUND / CEILING LIGHT

(Lamps Sold Separately)

VOLTAGE 12V SOFT INDIRECT LED 1.5W, 2.5W OR 3.5W T3 PROJECTED BEAM LED 2.5W MR8 KELVIN OPTIONS 2700K / 3000K LENS TEMPERED FROST MATERIAL CAST BRASS NATURAL BRONZE (NBZ) OR STAINLESS STEEL (SS) FINISH MOUNTING POUR SLEEVE INCLUDED SOFT LIGHT PROJECTION SEE PG 55 DIRECT LIGHT PROJECTION SEE PG 55

2-1/8" H

MODEL SD 610B

1-9/16

CORE

WIDTH

MODEL SD 612B

VOLTAGE 12V SOFT INDIRECT LED 1.5W, 2.5W OR 3.5W T3

KELVIN OPTIONS 2700K / 3000K

LENS TEMPERED FROST MATERIAL CAST BRASS

SEE PG 55

SEE PG 55

NATURAL BRONZE (NBZ)

POUR SLEEVE INCLUDED

PROJECTED BEAM LED 2.5W MR8

FINISH

MOUNTING

1-9/16

CORE


WDTH

SOFT LIGHT PROJECTION

DIRECT LIGHT PROJECTION



ALSO AVAILABLE IN STAINLESS STEEL FINISH






8" Pour Sleeve



DECK / WALL / IN GROUND / CEILING LIGHT (Lamps Sold Separately)




8" Pour Sleeve

# **IN GROUND PAR 36**

(Lamps Sold Separately)





MODEL IG 300P 9 VOLTAGE 12V 6W OR 10W PAR36 (SOLD SEPARATELY) LED **KELVIN OPTIONS** 2700K / 3000K COVER OPTION IG 304B MATERIAL ABS IN GROUND BRASS / GLASS IG 304B LIGHT PROJECTION SEE PG 55

#### 5 5/8" Well Trim Cover Option

Fits IG 300P (Sold Separately)



Brass Debris Guard Model: IG 304B (Fits Flat Side Only)

818.349.2663 IN GROUND LIGHTING 33

# STEP / DECK LIGHTING


2 SV AP

JAU/

STEP AND DECK LIGHTS PROVIDE ACCENT AND SAFETY LIGHTING, WHILE BEAUTIFULLY DEFINING PEDESTRIAN AREAS.


#### SURFACE MOUNTED LED STEP LIGHT SERIES

Our flush step lights are designed as accent lights for steps, stairs and niches. Easy installation - Attaches to any surface without a housing box.

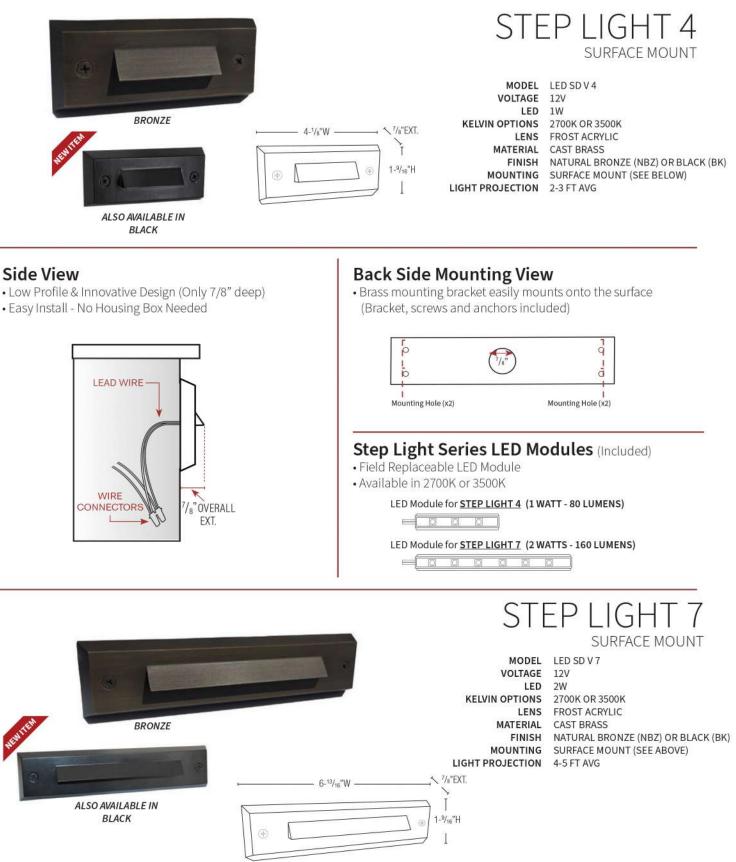

## 12V MASONRY ACCENT LIGHT WITH GLARE CONTROL

Ideal for column caps, retaining walls, benches, stairs, etc. These fixtures are designed to install under an architectural lip for accent lighting - casting light in a downward position. These fixtures may also be used without the masonry plate, and set in place under a small overhang. *Replaceable and Serviceable LED Bar* 

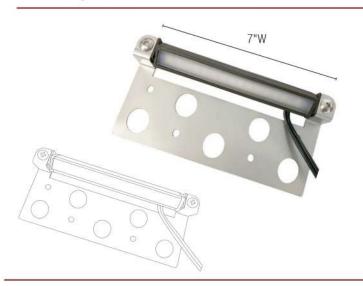

13"W

# MASONRY LIGHT 7

MODEL LED ML 7 VOLTAGE 12V LED 1.2W KELVIN OPTIONS 2700K OR 3000K LUMENS 80 LENS FROSTED ACRYLIC MATERIAL CAST ALUMINUM / STAINLESS STEEL FINISH BRONZE (BZ) LIGHT PROJECTION 4-6 FT AVG

# MASONRY LIGHT 13


MODELLED ML 13VOLTAGE12VLED2.4WKELVIN OPTIONS2700K OR 3000KLUMENS150LENSFROSTED ACRYLICMATERIALCAST ALUMINUM / STAINLESS STEELFINISHBRONZE (BZ)LIGHT PROJECTION6-8 FT AVG



## SINGLE RECESSED STEP | IGHT

(Lamps Sold Separately)

MODEL SD 400B VOLTAGE 12V LED 2.5W OR 3.5W SC KELVIN OPTIONS 2700K / 3000K MATERIAL SOLID BRASS MAX LAMP 26W



MOUNTING HOLE PLACEMENT 31/4" ON CENTER





SINGLE LOUVER

MODEL SD 401B MATERIAL FINISH LIGHT PROJECTION 2-3 FT AVG

DIMENSIONS 4-5/8"W X 2-7/8"H LENS OPAQUE ACRYLIC SOLID BRASS NATURAL BRONZE (NBZ)



#### SINGLE WINDOW

MODEL	SD 402B
DIMENSIONS	4-5/8"W X 2-7/8"H
LENS	OPAQUE ACRYLIC
MATERIAL	SOLID BRASS
FINISH	NATURAL BRONZE (NBZ)
LIGHT PROJECTION	2-3 FT AVG

DOUBLE RECESSED STEP LIGHT

(Lamps Sold Separately)



MOUNTING HOLE PLACEMENT 7 1/2" ON CENTER

# **COVER OPTIONS**



DOUBLE LOUVER MODEL SD 404B DIMENSIONS 8-5/8"W X 3"H LENS OPAQUE ACRYLIC MATERIAL SOLID BRASS FINISH NATURAL BRONZE (NBZ) LIGHT PROJECTION 4-5 FT AVG

MODEL SD 403B VOLTAGE 12V **KELVIN OPTIONS** MATERIAL MAX LAMP 52W

LED 2.5W OR 3.5W SC 2700K / 3000K SOLID BRASS NOTE REQUIRES 2 LAMPS

- 8-3/4"W -3"D 2-1/8"H

NOTE: MEASUREMENT INCLUDES END TABS



DOUBLE WINDOW MODEL SD 405B DIMENSIONS 8-5/8"W X 3"H LENS OPAQUE ACRYLIC MATERIAL SOLID BRASS FINISH NATURAL BRONZE (NBZ) LIGHT PROJECTION 4-5 FT AVG

# CORE FLAT TOP DECK / WALL / IN GROUND / CEILING LIGHT (Lamps Sold Separately)

# CORE SCOOP TOP

DECK / WALL / IN GROUND / CEILING LIGHT (Lamps Sold Separately)

Complete

Fixture



DIRECT LIGHT PROJECTION SEE PG 55 EYEBROW


SURFACE MOUNT

SOFT LIGHT PROJECTION



SEE PG 55

MODEL SD 406B VOLTAGE 12V 1.5W, 2.5W, 3.5W, 5W OR 6W T3 LED **KELVIN OPTIONS** 2700K / 3000K **TEMPERED FROST** LENS MATERIAL CAST BRASS NATURAL BRONZE (NBZ) FINISH MOUNTING BACK PLATE INCLUDED MAX LAMP 20W LIGHT PROJECTION SEE PG 55



VOLTAGE

LED **KELVIN OPTIONS** LENS MATERIAL FINISH MOUNTING MAX LAMP LIGHT PROJECTION

SOFT LIGHT PROJECTION

DIRECT LIGHT PROJECTION

SEE PG 55

SEE PG 55

MODEL W 701B 12V 3.5W, OR 4.5W MR16 2700K / 3000K **TEMPERED FROST** CAST BRASS NATURAL BRONZE (NBZ) BACK PLATE INCLUDED 35W SEE PG 55

3-1/4"EXT.

NOTE: Requires 2 lamps for up and down functionality. Can be used as up or down light only (use 1 lamp for this application)

JP DOWN

2 LAMP - UP AND DOWN LIGHT

- 2-3/8"W ----

SURFACE MOUNT

(Lamps Sold Separately)

5-1/2"H





(Lamps Sold Separately)

(Lamps Sold Separately)

(Lamps Sold Separately) 818.349.2663 HANGING PENDANT LIGHTING 39

# **GLOBE** COLLECTION

INTRODUCING OUR NEW PROPRIETARY GLOBE SERIES

- ACRYLIC GLOBES PENDANTS, LANDSCAPE, COLUMN AND CEILING DESIGNS
- ORGANIC VINE GLOBES NATURAL & ELEGANT TREE ORNAMENTS
- GEO GLOBES SOLID BRASS GEOMETRIC ORNAMENTS

MOUNTING BRASS FLUSH MOUNT WITH NATURAL

**BRONZE FINISH** 

LED 2.5W, 3.5W, 5W AND 6W T3 (SOLD SEPARATELY)

ACRYLIC OPERATING TEMP -5 DEGREE F TO 140 DEGREE

VOLTAGE 12V **KELVIN OPTIONS** MATERIAL / COLOR WHITE ACRYLIC LEAD WIRE 3 FT. MOUNTING

MODEL GL-CM-GLOBE-SIZE LED 2.5W, 3.5W, 5W AND 6W T3 (SOLD SEPARATELY) 2700K / 3000K STANDARD SIZES 8", 10" AND 12" (4" NECK) SPECIAL ORDER SIZES 14", 16", 18" AND 20" (6" NECK) SOCKET BI PIN T3 BRASS COLUMN MOUNT BASE WITH NATURAL **BRONZE FINISH** 

8", 10", 12", 14", 16", 18" and 20"

COLUMN GLOBES

ACRYLIC OPERATING TEMP -5 DEGREE F TO 140 DEGREE

CORD MOUNTING FINISH

- SOCKET 18 FT. BLACK WIRE WITH GALVANIZED SUSPENSION CABLE BRASS FITTER WITH NATURAL BRONZE
- MATERIAL / COLOR WHITE ACRYLIC **BI PIN T3**
- KELVIN OPTIONS 2700K / 3000K STANDARD SIZES 8", 10" AND 12" \*(4" NECK) SPECIAL ORDER SIZES 14", 16", 18" AND 20" (6" NECK)
- VOLTAGE 12V LED 2.5W, 3.5W, 5W AND 6W T3 (SOLD SEPARATELY)
- MODEL GL-H-GLOBE-SIZE

and 20"

8", 10", 12", 14", 16", 18"

# PENDANT GLOBES

# LANDSCAPE GLOBES

GLOBE COLLECTION

#### STANDARD SIZES 8", 10" AND 12" (4" NECK) SPECIAL ORDER SIZES 14", 16", 18" AND 20" (6" NECK) MATERIAL / COLOR WHITE ACRYLIC SOCKET **BI PIN T3** LEAD WIRE 3 FT. MOUNTING ACRYLIC OPERATING TEMP -5 DEGREE F TO 140 DEGREE

CEILING GLOBES

MODEL GL-FM-GLOBE-SIZE

STANDARD SIZES 8", 10" AND 12" (4" NECK)

SPECIAL ORDER SIZES 14", 16", 18" AND 20" (6" NECK)

**BI PIN T3** 

VOLTAGE 12V

KELVIN OPTIONS 2700K / 3000K

MATERIAL / COLOR WHITE ACRYLIC

ACRYLIC OPERATING TEMP -5 DEGREE F TO 140 DEGREE

SOCKET

LEAD WIRE 3 FT.

MODEL GL-AP-GLOBE-SIZE VOLTAGE 12V 2.5W, 3.5W, 5W AND 6W T3 (SOLD SEPARATELY) **KELVIN OPTIONS** 2700K / 3000K BRASS FITTER WITH NATURAL BRONZE FINISH AND GROUND STAKE



LED

8", 10", 12", 14", 16", 18" and 20"

and 20"

8", 10", 12", 14", 16", 18"



# **GEO GLOBES**



MODEL	GL-H-GEO-SIZE
VOLTAGE	12V
LED	1W E26 FILAMENT STYLE* (SOLD SEPARATELY)
KELVIN	24K
SIZES	6" AND 10"
MATERIAL / COLOR	SOLID BRASS
	NATURAL BRONZE FINISH
SOCKET	MEDIUM BASE
CORD	11 FT. BLACK CORD (16-2 GAUGE)
MOUNTING	CORD HUNG / ZIP TIES

\*2W, 4W OPTIONS AVAILABLE - SEE PG. 53

6" and 10"





# **ORGANIC VINE GLOBES**

MODEL	GL-H-VINE-SIZE
VOLTAGE	12V
LED	1W E26 FILAMENT STYLE* (SOLD SEPARATELY)
KELVIN	24K
STANDARD SIZES	8", 10", 12", 14", 16" 18", 20"
MATERIAL / COLOR	NATURAL VINES
SOCKET	MEDIUM BASE
CORD	11 FT. BLACK WIRE WITH GALVANIZED
	SUSPENSION CABLE
MOUNTING	CORD HUNG / ZIP TIES

\*2W, 4W OPTIONS AVAILABLE-SEE PG. 53



8", 10", 12", 14", 16", 18", 20"

	MODEL	GL-H-VINE-DOME
	VOLTAGE	12V
	LED	12V 1W E26 FILAMENT STYLE* (SOLD SEPARATELY)
	KELVIN	24K
	DIMENSIONS	20"W X 10"H
· Alexand	MATERIAL / COLOR	NATURAL VINES
	<b>VOLTAGE / SOCKET</b>	12V MEDIUM BASE
	CORD	11 FT. BLACK WIRE WITH GALVANIZED
		SUSPENSION CABLE
A DECEMBER OF THE PARTY OF THE	MOUNTING	CORD HUNG / ZIP TIES
		*2W, 4W OPTIONS AVAILABLE-SEE PG. 53

# ARCHITECTURAL STRING, BISTRO & LINEAR LIGHTING

BISTRO AND STRING LIGHTING ARE REMINISCENT OF OLD WORLD GATHERING SPACES CREATING AN INVITING ENVIRONMENT FOR DINING, PARTIES AND EVENTS. OUR LINEAR LIGHTING CREATES A MULTITUDE OF DESIGN OPTIONS FOR ANY OUTDOOR LIVING SPACE.

## E26 BISTRO STRING (SOLD BY THE FOOT) MEDIUM BASE (E26 SOCKET) / S14 LAMP SOCKET SPACING 24"



 MODEL
 BK E26

 SOCKET
 MEDIUM BASE (E26/E27)

 SOCKET DIMENSIONS
 1-3/8"W X 1-1/2"H

 SPACING
 24" ON CENTER

 VOLTAGE
 12V AC OR 120V AC

 12V MAX RUN (LED)
 200 FT

 120V MAX RUN (LED)
 300 FT

 CABLE
 16 GAUGE BLACK

 MAX WATTAGE
 1200W PER CIRCUIT

LAMPS SOLD SEPARATELY 12V: ADDITIONAL LEAD WIRE AVAILABLE PER FOOT (BK-LEAD) 120V: ADDITIONAL 8 FT POWER PLUG AVAILABLE (BK-PWR-MALE)

#### E26 SUSPENDED BISTRO STRING (SOLD BY THE FOOT) MEDIUM BASE (E26 SOCKET) / S14 LAMP

 MODEL
 BK E26 S

 SOCKET
 MEDIUM BASE (E26/E27)

 SOCKET DIMENSIONS
 1-3/8"W X 1-1/2"H

 SPACING
 24" ON CENTER

 VOLTAGE
 12V AC OR 120V AC

 12V MAX RUN (LED)
 200 FT

 120V MAX RUN (LED)
 300 FT

 CABLE
 16 GAUGE BLACK

 MAX WATTAGE
 1200W PER CIRCUIT



NOTE: SUSPENDED STRING IS NOT DESIGNED TO BE USED WITH SNAP ON SHADES BELOW LAMPS SOLD SEPARATELY 12V: ADDITIONAL LEAD WIRE AVAILABLE PER FOOT (BK-LEAD) 120V: ADDITIONAL 8 FT POWER PLUG AVAILABLE (BK-PWR-MALE)

## LAMP OPTIONS FOR E26 MEDIUM BASE (E26 SOCKET) / S14 LAMP (SOLD SEPARATELY)





#### E17 BISTRO STRING (SOLD BY THE FOOT) INTERMEDIATE BASE (E17 SOCKET) / G50 LAMP

MODEL BK E17 SOCKET INTERMEDIATE BASE (E17) SPACING 15" ON CENTER VOLTAGE 12V AC OR 120V AC 12V MAX RUN (LED) 200 FT CABLE 16 GAUGE BLACK

120V

AC

LAMPS SOLD SEPARATELY





12V: ADDITIONAL LEAD WIRE AVAILABLE PER FOOT (BK-LEAD) 120V: ADDITIONAL 8 FT POWER PLUG AVAILABLE (BK-PWR-MALE)



INTERMEDIATE BASE (E17 SOCKET) / G50 LAMP (SOLD SEPARATELY)


LAMP OPTIONS FOR E17

MODEL LED G50 1 120 FILAMENT VOLTAGE 120V WATTAGE 1W 2400K KELVIN LUMENS 100 DIMMABLE YES SIZE 2"W X 2-1/4"L



VOLTAGE 12V WATTAGE 1W KELVIN 2400K LUMENS 45 DIMMABLE YES SIZE 2"WX2-1/4"L

MODEL LED BK G50 1 12 FILAMENT



INSTALLATION ACCESSORIES SEE BISTRO SPEC SHEETS FOR FURTHER DETAILS



MODEL BK CABLE GS MATERIAL GALVANIZED AIRCRAFT CABLE DIAMETER 1/16" (7X7) AND 1/8" (7X7) STRENGTH 480 LBS / 1700 LBS ROLL SIZE 250 FT



MODEL BK TIES BK MATERIAL HEAVY DUTY NYLON LENGTH 8" WIDTH 1/3" STRENGTH 120 LBS **RESIDENTIAL GRADE** 



MODEL BK TIES SS MATERIAL 304 STAINLESS STEEL LENGTH 5" WIDTH 1/6" STRENGTH 150 LBS COMMERCIAL GRADE



MODEL BK CABLE CLAMP MATERIAL GALVANIZED SIZE 1/16" AND 1/8"

NOTE: REQUIRES (4) CABLE CLAMPS PER RUN (2 ON EACH END)

OPTIONAL ACCESSORIES NOT PROVIDED - POLES, J HOOKS, TURN BUCKLES

## FLEX STRIP OUTDOOR CURVILINEAR DIMMABLE LED 12V AC/DC

IDEAL FOR ABOVE GROUND APPLICATIONS (IP65)





LED-FLEX-1.5W-2700K-AC LED-FLEX-1.5W-3000K-AC

#### PRODUCT SPECIFICATIONS

MATERIAL	HIGH PERFORMANCE WHITE SILICONE. UV RESISTANT.
LENGTH PER ROLL	16.4 FT. STRIP LENGTH ROLLS
PRODUCT SIZE	X"WIDTH X ½" HEIGHT
VOLTAGE	12V
WATTAGE	1.5W PER FT. OR 24.6W PER ROLL
LUMENS	95 LM PER FT. AVG.
OPERATING VOLTAGE	11V TO 13V AC/DC
CUTTING	FIELD CUT-ABLE EVERY 33.3MM OR APPROX. 1.3 INCH
	(CUT MARKINGS ARE PRINTED ON THE ROLL)
IP RATING	IP65 (OUTDOOR RATED)
MAX RUN	16.4 FT. (1 ROLL)
LEAD WIRE	3 FT. LEAD WIRE ON BOTH ENDS
OPERATING TEMPERATURE	
DIMMING	12V LED IN-LINE DIMMER (LIGHTCRAFT BRAND) OR 120V PRIMARY SIDE DIMMING
	(SEE SPEC SHEET FOR MORE INFORMATION ON DIMMING)

#### **OPTIONAL ACCESSORIES**





LIVE END LED-FLEX-LIVE END CAP




DEAD END LED-FLEX-END CAP

# LED DAMP LOCATION TAPE (12V AC\*)

SOLD IN 16.4 FT ROLLS WITH 3 FT LEADS ON BOTH ENDS

Our LED Tape is now designed to be used with existing **12V AC landscape transformers** <u>without</u> the use of a dedicated driver or converter. LED Tape is typically used under stairs, toe kicks, counters, cabinets, bars, coves, overhead soffits, etc. Tape light is dimmable (see spec sheet). \*Also works on 12V DC power. \*Designed to be installed facing down only\*

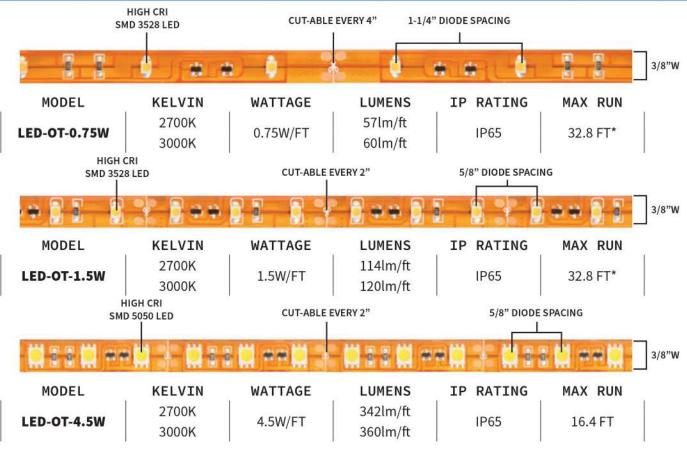

<u>MOUNTING</u>: BACK SIDE OF LED TAPE HAS 3M ADHESIVE. IT IS RECOMMENDED TO USE ADDITIONAL ADHESIVE FOR PERMANENT INSTALLS. <u>\*MAX RUN</u>: EACH ROLL IS 16.4 FT WITH 3 FT LEADS ON EACH END. TO RUN 32.8 FT, YOU MUST USE <u>LED-IL-CONN-10MM</u> TO JOIN (2) ROLLS TOGETHER.

## LED CHANNEL AND LENS OPTIONS



LENGTHS 48" PIECES

<u>Glare Control Channel</u> gives you added glare protection for multi-level LED tape installs.



#### GLARE CONTROL CHANNEL

MODEL LED TCH L DIMENSIONS 1/2"W X 3/8"H MATERIAL ALUMINUM LENGTHS 48" PIECES Slim Profile Channel & Lens is best for slim profile installs where a heavy diffuser lens is needed.



#### SLIM PROFILE CHANNEL & LENS\*\*

MODEL LED TCH SL1 DIMENSIONS 11/16"W X 5/16"H MATERIAL ALUMINUM LENS MATERIAL OPAQUE ACRYLIC LENGTHS 48" PIECES

\*\*LENS INCLUDED (EACH SET INCLUDES: 2 ENDS, 3 MOUNTING CLIPS & 3 SCREWS)

#### SNAP-ON CONNECTOR OPTIONS FOR LED TAPE

INDOOR / OUTDOOR RATED

Our Snap-On connectors are designed to easily connect additional power leads and jumpers or joining 2 rolls together. The connectors do not require soldering; simply cut at the designated marks and snap-on.

#### LED POWER LEAD



MODEL LED PWR WL 10MM DIMENSIONS 5/8"W x 5/8"L x 3 FT LEAD been used. (EXAMPLE: If you need (4) 4 ft runs, you can use the (2) 4 ft ends by cutting at the designated

The LED Power Lead adds a pigtail lead to connect the LED tape to your low voltage transformer, after the initial (2) factory installed leads on each end of the LED tape have

#### LED IN-LINE JUMPER




MODEL LED IL JUMPER 10MM DIMENSIONS 5/8"W x 5/8"L x 3" JUMPER X 5/8"W x 5/8"L

#### LED IN-LINE COUPLER



MODEL LED IL CONN 10MM DIMENSIONS 5/8"W x 5/8"L



The LED In-Line Jumper gives you the ability to create designs with a wide range of turns on one continuous run.

(Max run: 32.8 ft for 0.75w & 1.5 models; 16.4 ft for 4.5w model)

(EXAMPLE: If your design requires a 4 ft run with a 90° turn and then another 4 ft run, simply add a jumper in between the (2) 4 ft runs. One strip would have the pigtail lead which would attach to the low voltage cable.)

The LED In-Line Coupler lets you join 2 LED strips together.

(Max run: 32.8 ft for 0.75w & 1.5w models; 16.4 ft for 4.5w model)

(EXAMPLE: If you need (1) continuous run of 20 ft, you would join a 16 ft LED Tape strip with a 4 ft LED tape strip using the In-Line coupler. One strip would have the pigtail lead which would attach to the low voltage cable.)



## **ARCHITECTURAL TWISTED STRING LIGHTING (12V AC)**

Architectural Twisted String Lighting is ideal for creating patterns around architectural features. Highlighting shapes and sizes will add drama and excitement to specific features and areas of the landscape. 12V is safer than traditional 120V strings in the marketplace.

**Requires a 12V AC transformer.** 

# TWISTED 2700K MINI STRING LIGHTS (AC)

COMMERCIAL GRADE




MODEL LED MSL AC ROLL LENGTH 33 FT (100 LEDS) SOLD BY THE ROLL WATTAGE PER ROLL 9W MAX RUN 99 FT PER RUN (3 STRINGS) VOLTAGE 12V AC LED SPACING 4" SPACING **KELVIN** 2700K WIRE MATERIAL BLACK RUBBER (UV)



REQUIRED FOR EACH INDIVIDUAL RUN. CONNECTS THE LED-MSL-12 TO LOW VOLTAGE WIRE. CAN CONNECT UP TO 3 STRINGS PER RUN (99 FT) (SOLD SEPARATELY)


## VISTED <mark>RGB</mark>W MINI STRING LIGHTS (AC) COMMERCIAL GRADE

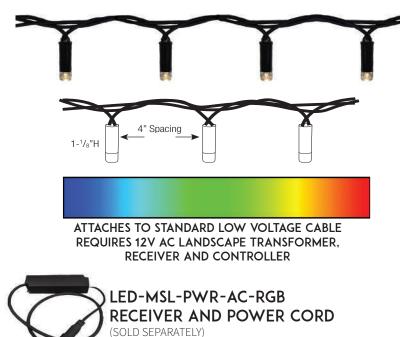

REQUIRED FOR EACH INDIVIDUAL RUN. CONNECTS THE LED-MSL-AC-RGB TO YOUR LOW VOLTAGE WIRE. CAN CONNECT UP TO 2 STRINGS PER RUN (66 FT) FOR MORE INFORMATION SEE SPEC SHEET

MODEL LED MSL AC RGB ROLL LENGTH 33 FT (100 LEDS) SOLD BY THE ROLL WATTAGE PER ROLL 9W MAX RUN 66 FT PER RUN (2 STRINGS) VOLTAGE 12V AC LED SPACING 4" SPACING **KELVIN** RGBW WIRE MATERIAL **BLACK RUBBER (UV** 

7 COLORS **8 FUNCTIONS** 



LED-MSL-AC-RC-RGB **RF REMOTE CONTROLLER** (SOLD SEPARATELY)

# JNDERWATER LIGHTIN

UNDERWATER LIGHTING CREATES A RICH AND ELEGANT AMBIANCE TO ANY WATER FEATURE. PONDS AND WATERFALLS COME ALIVE WITH LIGHT.

> MODEL H20 302B VOLTAGE 12V LED 1.8W GU4 COB (INCLUDED) KELVIN 2700K LENS FROST FLAT TEMPERED MATERIAL CAST BRASS FINISH NATURAL BRONZE MOUNTING PEBBLE TRAY CORD LENGTH 25 FT SJW CORD LIGHT PROJECTION UP TO 15 FT MAX WATER DEPTH UP TO 6 FT

2-3/4"W ----1-3/4"H 3-7/\*\*W SHOWN WITH STAND



- 1-3/4"W -SHOWN WITHOUT STAND



MARINER

COMPACT UNDERWATER ACCENT

Г

MINI UNDERWATER ACCENT

UNDERWATER

MODEL H20 402B VOLTAGE 12V LED 2.5W MR11 (SOLD SEPARATELY) KELVIN OPTIONS 2700K / 3000K BEAM OPTIONS SEE PAGE 52 LENS CLEAR TEMPERED MATERIAL CAST BRASS FINISH NATURAL BRONZE (NBZ) MOUNTING SELF WEIGHTED BASE CORD LENGTH 25 FT SJW CORD **OPTIONAL LENGTH** 100 FT MAX LAMP 20W LIGHT PROJECTION UP TO 25 FT MAX WATER DEPTH UP TO 6 FT

4' MAX H




NEPTUNE UNDERWATER ACCENT

MODEL	H20 502B	
VOLTAGE	12V	~
LED	3.5W, 4.5W OR 5.5W MR16 (SOLD SEPARATELY)	
<b>KELVIN OPTIONS</b>	2700K / 3000K	I 3-1/2"\
<b>BEAM OPTIONS</b>	SEE PAGE 52	la l
LENS	CLEAR TEMPERED	( ) )
MATERIAL	CAST BRASS	
FINISH	NATURAL BRASS	5-3/4"
MOUNTING	SELF WEIGHTED BASE	MAX H ( )
CORD LENGTH	25 FT SJW CORD	L.A.
<b>OPTIONAL LENGTH</b>	50 FT AND 100 FT SJW CORD	
MAX LAMP	35W	
LIGHT PROJECTION	UP TO 35 FT	
MAX WATER DEPTH	UP TO 6 FT	1





# **PREMIUM LINE** LED 12V MR 16

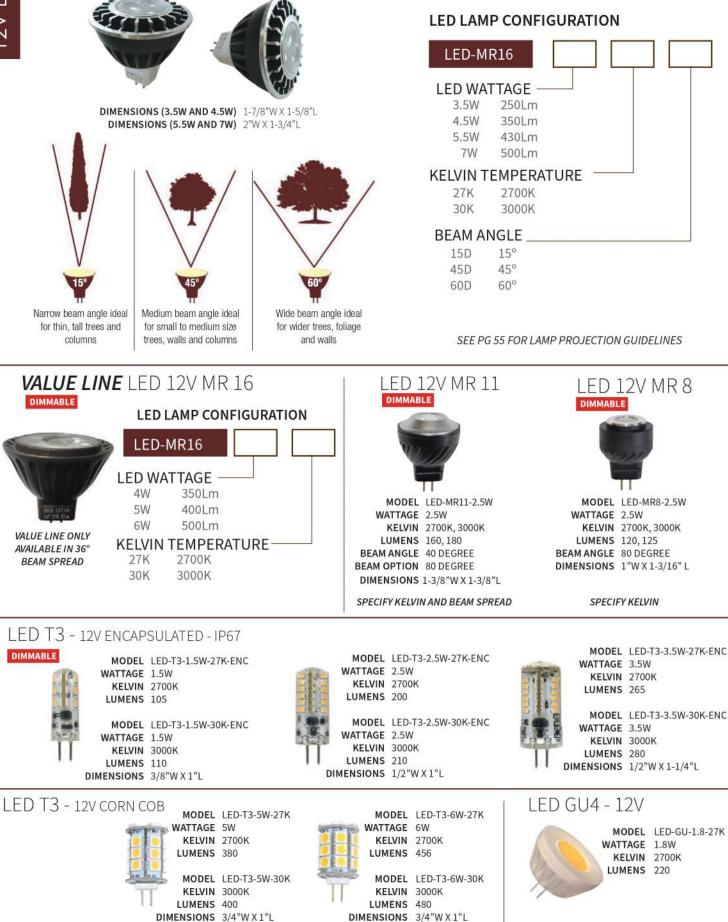





**COOL WHITE (5500K)** Refreshing and energizing *Resembles Moonlight* 

MODEL LED-SC-2.5W-27K-ENC WATTAGE 2.5W KELVIN 2700K LUMENS 200

 MODEL
 LED-SC-2.5W-30K-ENC

 WATTAGE
 2.5W

 KELVIN
 3000K

 LUMENS
 210

 DIMENSIONS
 1/2"W X 7/8"L





MODEL LED-SC-3.5W-30K-ENC WATTAGE 3.5W KELVIN 3000K LUMENS 280 DIMENSIONS 5/8"W X 1"L

MODEL LED-SC-3.5W-27K-ENC






 MODEL
 LED-WDG-1.5W-30K


 WATTAGE
 1.5W

 KELVIN
 3000K

 LUMENS
 135

 DIMENSIONS
 3/8"W X 1-3/8"L

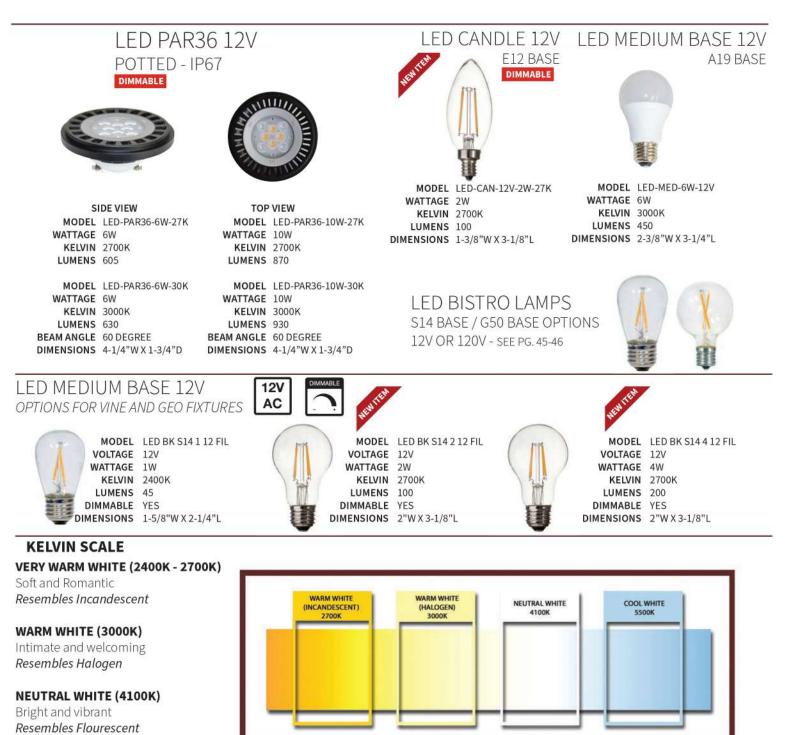

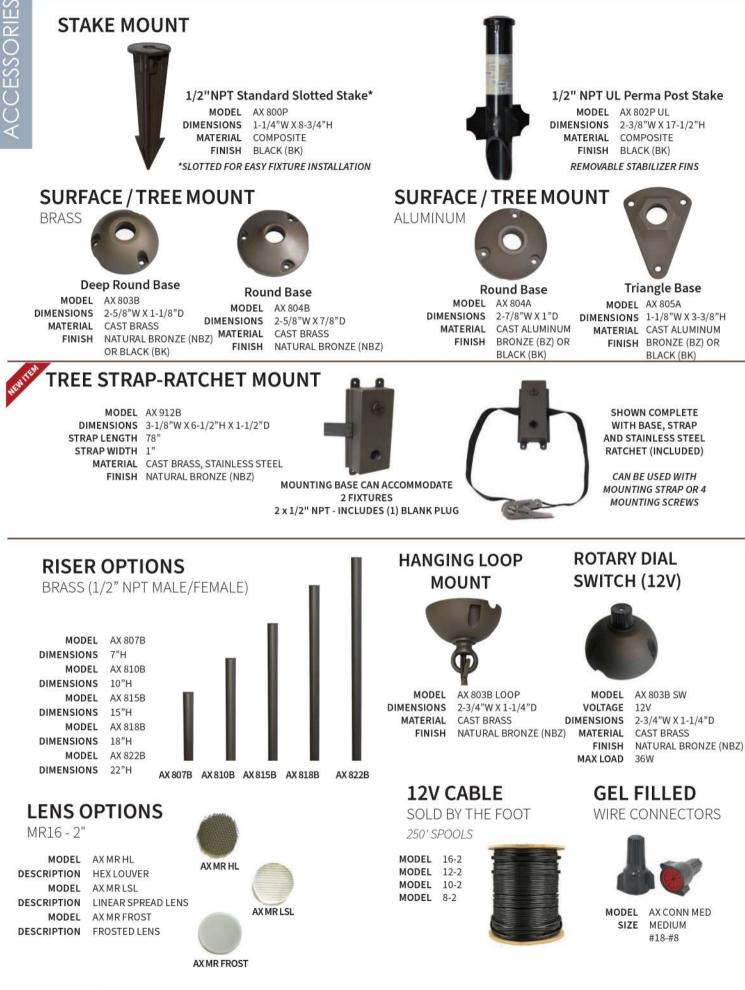

# fransformers 120V/12V

# STAINLESS STEEL TRANSFORMERS - 120V/12V

Our Stainless Steel Transformers are Ideal for Landscape Lighting Designs and Installations. 12V AC Professional Series

\*SERVICEABLE AND REPLACEABLE CONTROLS, EXTRA LARGE TERMINAL LUGS, 25A 12V CIRCUIT BREAKER

## MULTI-TAP SS PRO SERIES (TIMER / PHOTO OPTIONS) - 12V-15V AC & 12V-22V AC

	MODEL	WATTAGE	VOLTAGE	CURRENT	MANUAL	ASTRO TIMER	PHOTO CELL	WIDTH	HEIGHT	DEPTH
	TR-50-1215-SS	50W	12V TO 15V	Í.	[			5-3/4"	10-1/8"	4-5/8"
	TR-150-1215-SS	150W	12V TO 15V					5-3/4"	10-1/8"	4-5/8"
6	TR-300-1215-SS	300W	12V TO 15V					6-3/4"	14"	4-3/4"
600	TR-300-1222-SS	300W	12V TO 22V	AC	OPTION	OPTION	OPTION	6-3/4"	14"	4-3/4"
- Va	TR-600-1215-SS	600W	12V TO 15V					6-3/4"	14"	4-3/4"
20.000	TR-600-1222-SS	600W	12V TO 22V					6-3/4"	14"	4-3/4"
and some of the	TR-1200-1222-SS	1200W	12V TO 22V					8-1/2"	19"	5-1/2"

## **Key Features**

- Stainless Steel
- Fully Loadable •
- Pluggable Timer and Photo **Cell Receptacles**
- Compatible with Most Plug-in Module Controllers
- Dimmable
- **Magnetic** Core

- **Primary and Secondary Protection**
- **Runs Quiet and Cool**
- **ETL Listed**
- Limited 10 Year Warranty





MANUAL TIMER MODEL TRT101 DIMENSIONS 3"W X 3"H X 1-5/8"D



ASTRONOMIC TIMER MODEL TR T 105 DIMENSIONS 3-1/8"W X 3-1/4"H X1-7/8"D



MODEL TR TP 102 DIMENSIONS 1-1/2"W X 4-1/2"H X1-3/8"D

12V	AC	LED	DIMMER



MODEL	LED DIM 12V
VOLTAGE	12V
MAX LOAD	120W AT 12V AC
CURRENT CAPACITY	10A
DIMENSIONS	2-3/4"W X 4-1/2"H X 2" DEEF
FINISH	BLACK (BK)

- DIMS MOST 12V LED LAMPS UP TO 90% SHORT-CIRCUIT PROTECTION WITH SIMPLE RECOVERY - FUSE INCLUDED TRANSIENT PROTECTION (SUPPLY SIDE AND LOAD SIDE)
- EXTREMELY SMOOTH DIMMING
  - IP65 (DUSTPROOF, WATER RESISITANT, POTTED ELECTRONICS)
  - INTELLIGENT SOFT-START
  - ADJUSTABLE KNOB FOR VOLTAGE REGULATION
  - RUNS COOL AND QUIET
  - TURNS OFF WITH A CLICK

INSTALLS ON THE LOW VOLTAGE SIDE BETWEEN THE TRANSFORMER AND 12V FIXTURES. FOR USE WITH 12V AC MAGNETIC TRANSFORMERS ONLY OPERATES ONLY WITH 12V DIMMABLE LAMPS FULLY TESTED WITH LIGHTCRAFT DIMMABLE LED LAMPS AND TRANSFORMERS J BOX / HOUSING REQUIRED - NOT INCLUDED

#### SUGGESTED LAMP GUIDE PAR36 Lamp

LIGHT PROJECTION

MR16 Lamp **Direct Illumination** 

Used for direct and specific illumination Up to 20 ft. - 3.5W / 280 lm avg. Up to 30 ft. - 4.5W / 320 lm avg. Up to 40 ft. - 5.5W / 420 lm avg. Up to 50 ft. - 7W / 500 lm avg. Specify: Wattage, Kelvin, Beam Angle Note: Interchangeable with T3 lamp

**Direct Illumination** Used for wide light distribution Up to 25 ft. - 6W/ 605 lm avg. Up to 40 ft. - 10W/ 870 lm avg. Specify: Wattage, Kelvin, Beam Angle

#### Larger Scale Flood Lighting

Up to 15 ft. wide - 6W Integrated Up to 40 ft. wide - 20W Integrated Specify: Wattage and Kelvin

### T3 Lamp Indirect Illumination Used for soft accent lighting

Up to 3 ft. wide - 2.5W / 200 lm avg. Up to 5 ft. wide - 3.5W / 265 lm avg. Up to 7 ft. wide - 5W / 400 lm avg. Up to 8 ft. wide - 6W / 480 lm avg. Specify: Wattage and Kelvin Note: Interchangeable with MR16 lamp



9811 OWENSMOUTH AVE | UNIT 1 | CHATSWORTH, CA 91311 PHONE: 818.349.2663 | FAX: 818.349.2676 EMAIL: SALES@LIGHTCRAFTOUTDOOR.COM WWW.LIGHTCRAFTOUTDOOR.COM